

CLEANING CONCRETE FORMWORK COMPONENTS

Model LIMA 600 L and Grat-O-Fix® 600 L is already
being used by more than 50
Formwork Companies worldwide.
Approx. max. filling weight: 800 kg LIMA machine
600 kg Grat-O-Fix machine
Variable drum rotation: 4-18 rpm
Size: 3000 mm wide x 1500 mm deep x 2000 mm high




Model Grat-O-Fix ® 600 L in action in Dubai during the building
Of the Burj Al Arab hotel



Drum filled with different size parts



The latest design. On the left with doors and drum open, on the right with doors and drum closed

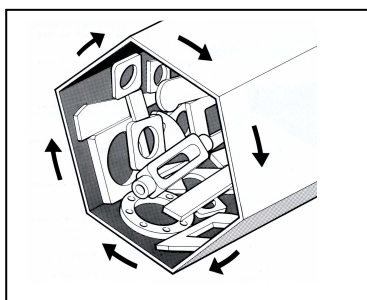

HOW IT WORKS

Tip parts into the drum from a container. Set rotational speed and timer. Wait 15 to 20 minutes for the parts being cleaned. The concrete dust is automatically extracted. At the end of the cycle tip contents from the drum into a container under the drum.

HEALTH AND SAFETY

The drum is lined with an extra tough elastomer lining which has a life of approx. 10 years. Dust is extracted by a built in dust collection unit. The noise level is approx. 72 dBA (The sketch on the left shows flame cut steel blanks being deburred. The principle is the same on all machines.